

Suitable on flush tanks Geberit Italia UP720 and UP320 produced from 2010


Geberit references
 UNICA 109.770.00.1
 COMBIFIX 110.770.00.1
 DUOFIX 111.726.00.1
 COMBIFIX 110.358.00.5
 DUOFIX 111.300.00.5

MATERIAL SUPPLIED

No 2 THREADED BUSHINGS 12x14



No 2 PINS FOR THE BUTTONS

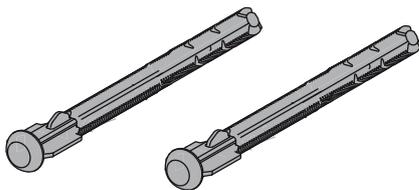

No 2 M4x60



No 1 KEY 2.5



NECESSARY TOOLS


No 1 CH12




No HACKSAW



1. Remove the protective cover

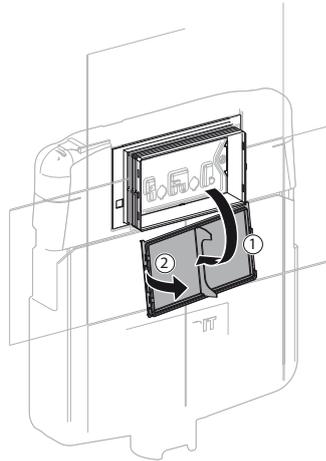

2. Shorten the protection cover

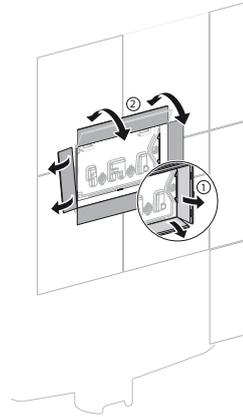


2. Finish the components installation of the flush tank and joint the water

COVER MOUNTING



1

Screw the bushings into the inner border of the box

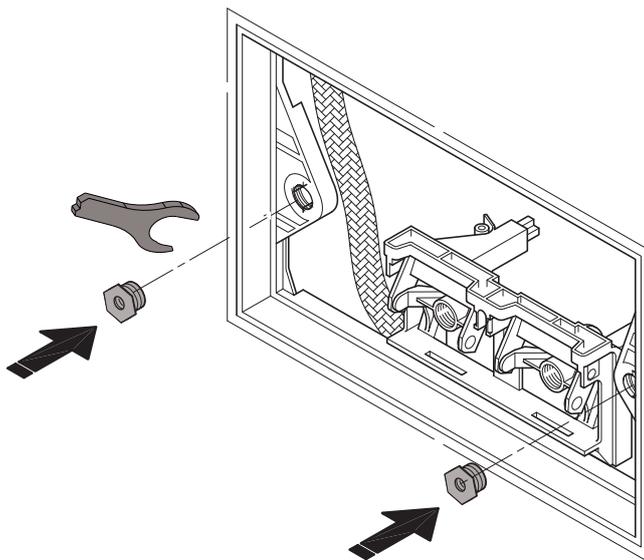

2


Screw the bushings into the threaded seats of the actuating device of the discharge. Screw the pins into the bushings

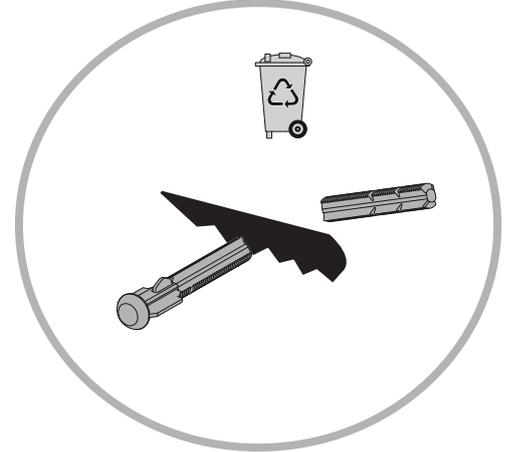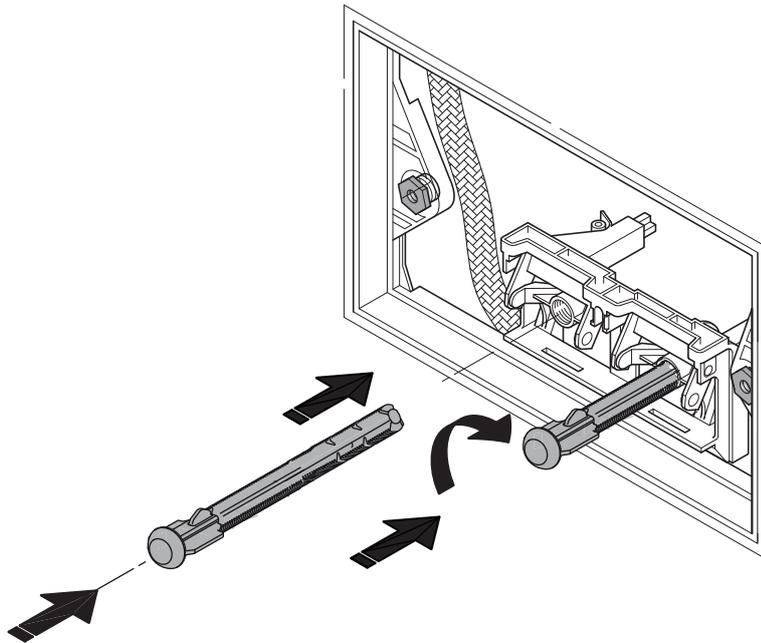

Could be necessary shorten the pins for the button


3

Regulate the length of the pins and fix them screwing the nut

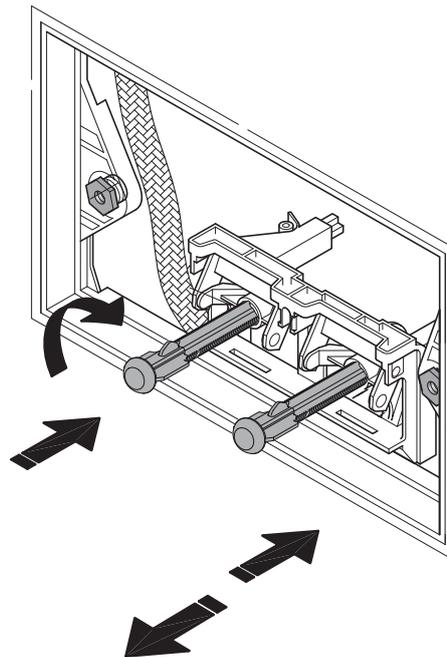

4

Align the pins for insert them into the rear of the buttons.
Place the plate and prepare it to fix by the screw, if the pins are too little or too long respect the buttons, remove the plate and proceed with a nex ajustement of the buttons.
May be necessary a lot of ajustement of the pins in order to optimize the flow of the water and the drive correct opening and closing thereof.

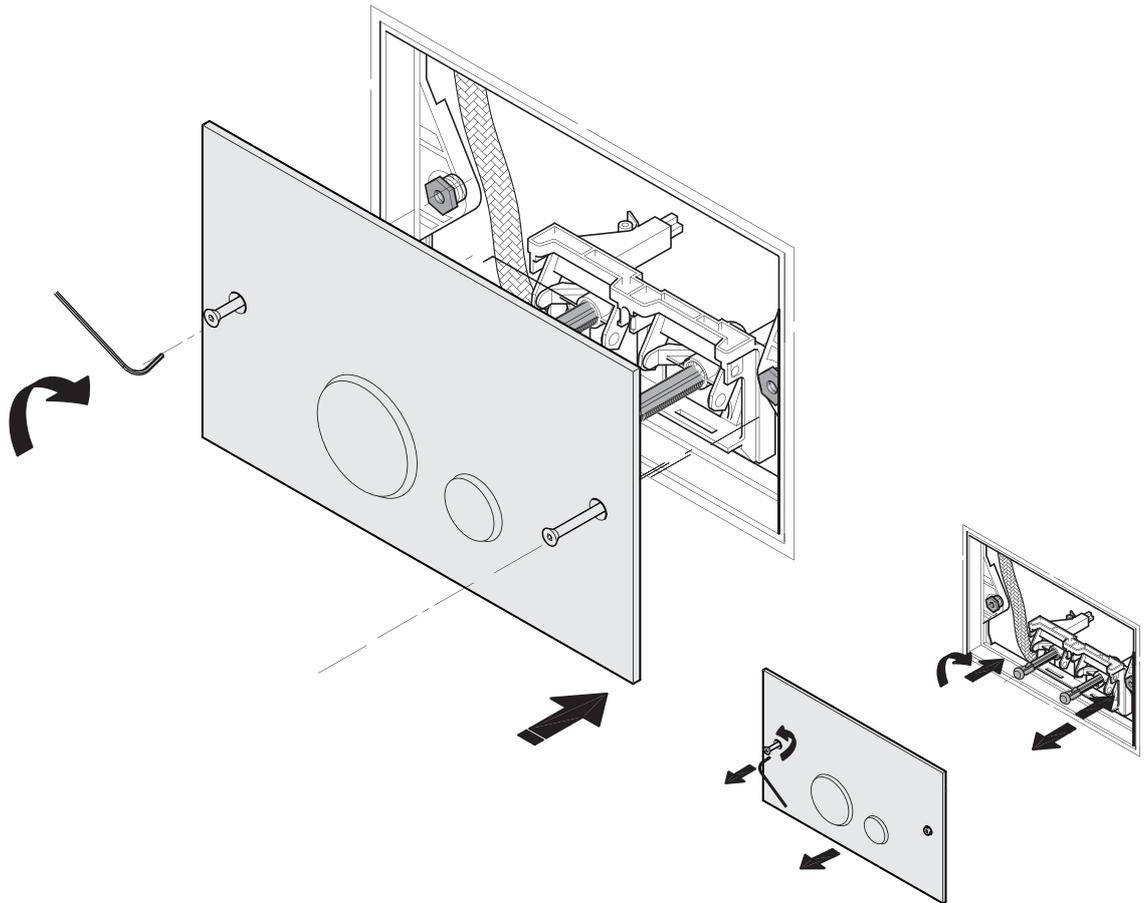

5

After the regulation fix the plate to the wall.

